


0001 Series Exterior Light



ADL.0001.R01.99



ADL.0001.B01.99

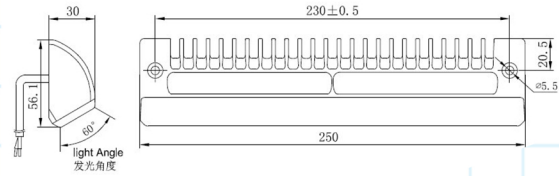

Part Number	Functions	Lumens	Voltage
ADL.0001.R01.99	Awning/Work Light	1600Lm	10-33v
ADL.0001.B01.99	Awning/Work Light	1600Lm	10-33v
ADL.0001.W01.99	Awning/Work Light	1600Lm	10-33v

Light Emitting Angle: H=80°/V=60°(vertical direction of the outer lens)

Aluminum die cast Base, UV and corrosion resistant and painted in white, black or red.

A 40 degree down illumination for more efficient light on ground ,surface mount installation, IP67 for outdoor use, die-cast aluminum base to ensure good heat dissipation and lamp life. widely used for Shelter, Cabin, Motor home, Caravan, Truck, Special vehicles and many more.

0009 Series Exterior Light




ALS.0009.W01.99 (16") White

ALS.0009.B05.99 (16") Black



ALS.0009.B01.99 (9")

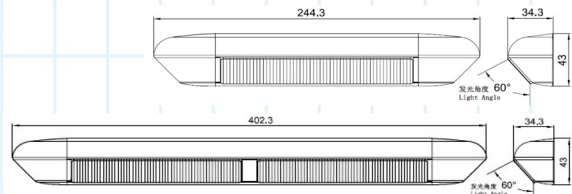

Part Number	Functions	Lumens	Voltage
ALS.0009.W05.99 (9")	Awning/Work Light White	1000Lm	10-33v
ALS.0009.B01.99 (9")	Awning/Work Light Black	1000Lm	10-33v
ALS.0009.W01.99 (16")	Awning/Work Light White	2000Lm	10-33v
ALS.0009.B05.99 (16")	Awning/Work Light Black	2000Lm	10-33v

Light Emitting Angle:H80°/V=60°V(vertical direction of the outer lens).

Aluminum extrusion housing, UV resistant painting in white / black.

The 40 degree down illumination for more efficient light; Surface mount Installation, waterproof design; White or Black painted aluminum extrusion housing design makes it easy to dissipate heat, and ensures its long working life span. IP67